



Installation Instruction of Concealed Thermostatic Mixer

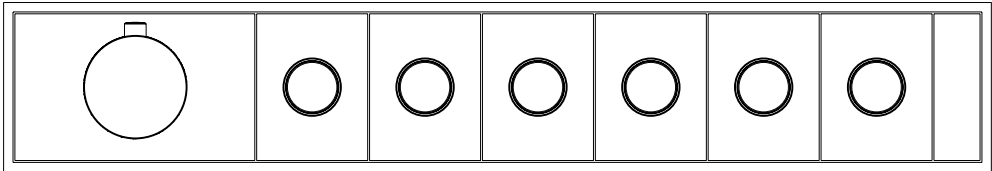

Please read the instruction carefully before installation and keep it properly

List of standard components


Please make sure all components in the list are completely in the box when you open it. Kindly contact with us if any missing parts. If there is any replacement of components without affecting the functionality advance notice, will be not provided. The appearance of product is subject to the actual item, this illustration is for reference only.

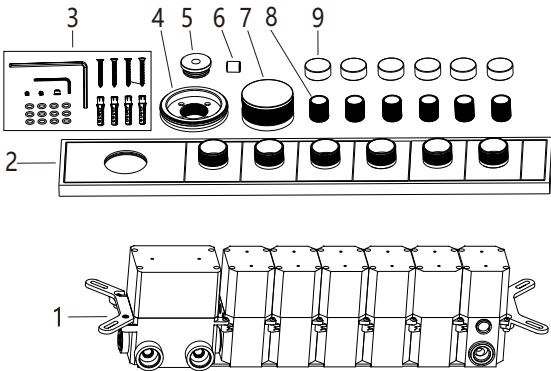


Components List		
No.	Description	Qty
1	ABS Embedded Box	1
2	Plate Combination	1
3	Kits	1
4	Fix Nut for Plate	1
5	Level	1
6	Rod of Thermostatic Handle	1
7	Thermostatic Handle	1
8	Sleeve	6
9	Button	6

Installation Steps

1.Please make sure to clean the pipe before installing the body in order to avoid blocking of the mixer and affect the normal use.




2.Make slot on the wall (Make slot properly according to the dimension of body and the height of using, suggested dimension of the slot is 95*515*65mm).

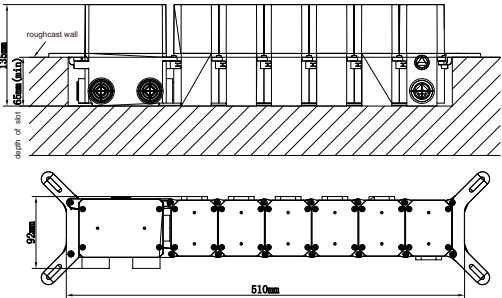


3.Installation of concealed thermostatic mixer

Put the body into the slot, pull out four plastic brackets, adjust body to the suitable position with the level then mark the points for fixing screws, make holes with the $\phi 6$ drill in the depth of 40mm in the points marked, drive the expansion screws into the holes, fix the screws through the brackets to expansion screws by phillips screwdriver.

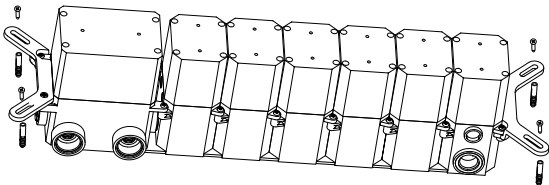


4. Pressure sealing test

- (1) Wrap the thread of the connector of inlet and outlet of the body with teflon tape, then assemble with the body and check whether the cold and hot water pipes are connected correctly.
- (2) Test the sealing performance of the pipes holding pressure level (recommended 1.2Mpa), make sure there is no leakage.

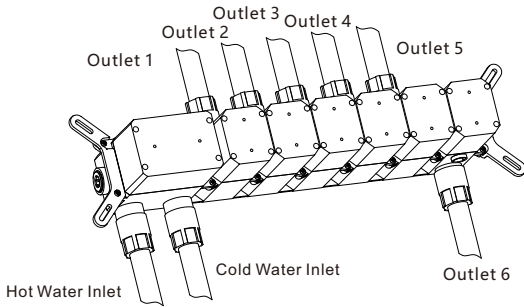


5. Fill the slot with filler and tile the wall after install the body.

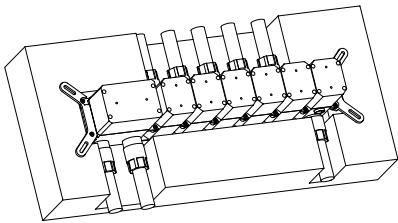


Tile the Wall →

Tile Hole Dimensions


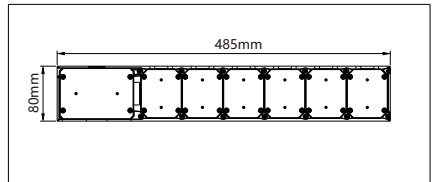


6. Discharge the cover of the concealed body

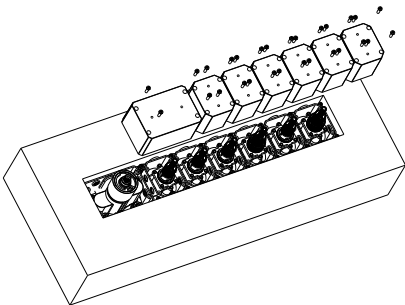


7. Assemble the fixing nut for plate


The bottom of it is at the same level as the tiles.

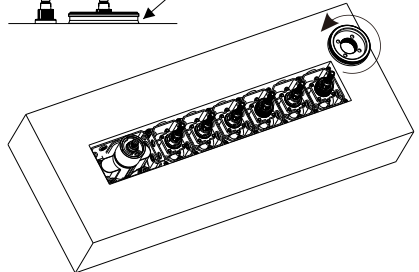


8.Assemble the plate combination

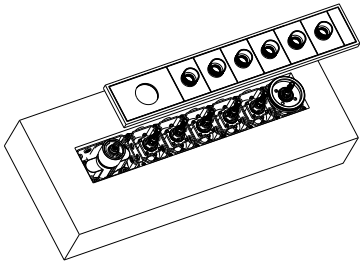


9.Assemble the sleeve on each button

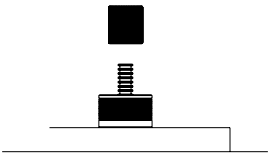


10.Cut the spare part of each rod with the auxiliary tool while the cartridge is off

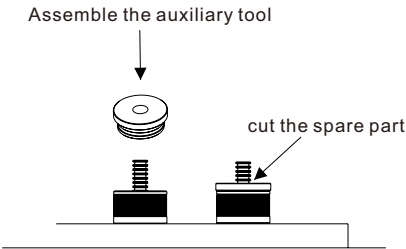

11. Assemble two rings on the top of each adjustment rod then assemble the buttons

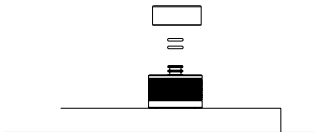

12.Assemble the thermostatic handle and tighten it with hexagon screw, then press the rod on the handle

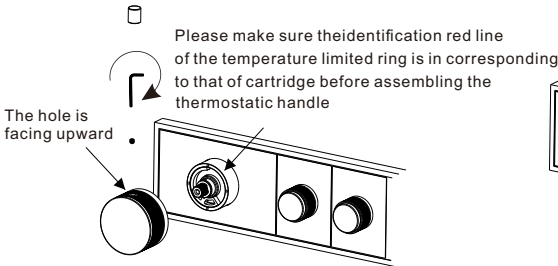

13.Finish

